




















**Best Master Furniture™**  
The Imported Furniture Specialist

# ASSEMBLY INSTRUCTION

## ITEM: KF0024 | KF0025


### PARTS LIST

PARTS#	PARTS NAME	DRAWING	QTY	PARTS#	PARTS NAME	DRAWING	QTY
A	FLAT WASHER 5/16"X 3/4"		9	L	PLUG		2
B	LOCK WASHER 5/16"		9	M	FRONT LEG		2
C	BOLTS DIA 5/16"X3"		4	N	LEFT ARM		1
D	BOLTS DIA 5/16"X2-1/2"		4	O	RIGHT ARM		1
E	BOLTS DIA 5/16"X1 1/2"		1	P	SEAT FRAME		1
F	ALLEN WRENCH 5/16"		1	Q	CHAIR BACK		1
G	FLAT WASHER 1/4"X 5/8"		6				
H	LOCK WASHER 1/4"		6				
I	BOLTS DIA 1/4"X1 1/2"		2				
J	BOLTS DIA 1/4"X1 1/4"		4				
K	ALLEN WRENCH 1/4"		1				

Note: Do Not tighten bolts until assembly is fully completed.

#### STEP 1.

Remove all parts from carton and separate them into part number groups as indicated on the part list. Place the chair back (Q) on a smooth flat surface with the holes facing up. Loosely tighten all bolts until instructed to fully tighten at the end of step.

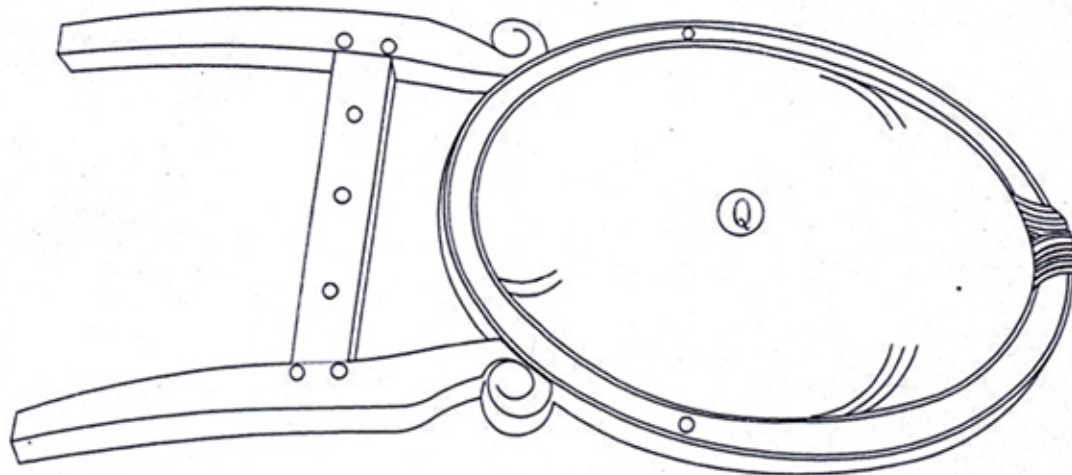




**Best Master Furniture™**  
The Imported Furniture Specialist

# ASSEMBLY INSTRUCTION



## ITEM: KF0024 | KF0025

Attach seat frame (P) to chair back (Q). Insert flat washer (A) lock washer (B) and bolts (E) through center hole of back rail. Insert flat washer (A) lock washer (B) and bolts (C) through corner block to back leg. Use allen wrench (F) to secure bolts (C,E). Tighten slightly not fully.

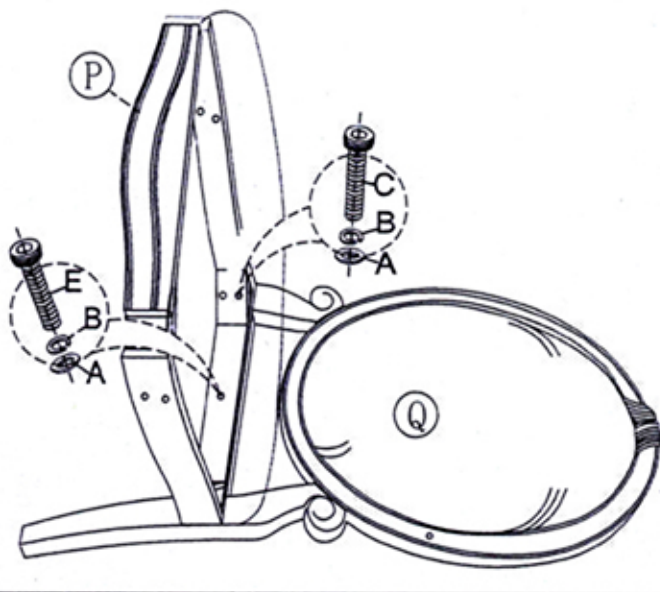

### STEP 4.

Caution : Use of incorrect bolts in the section could result in damage to the arm. Attach the arm to the seat frame (P) with flat washer (G) lock washer (H) and bolts (J) using wrench (K).

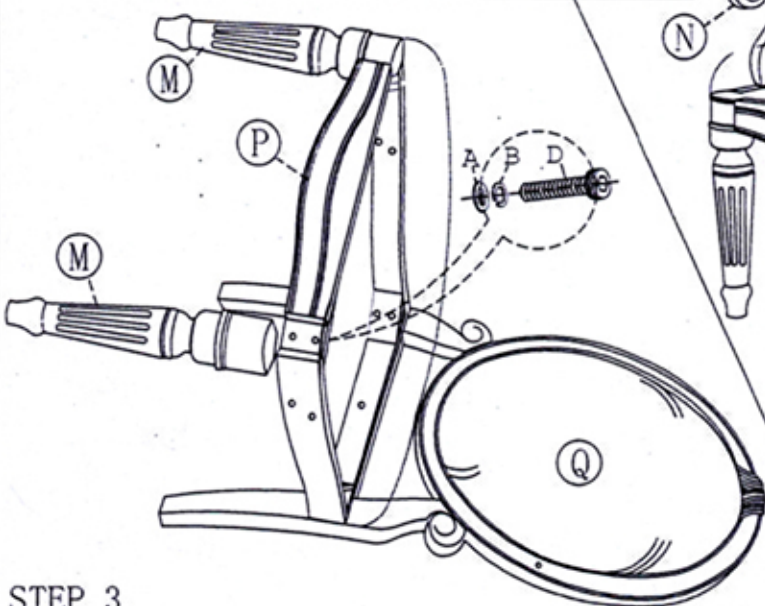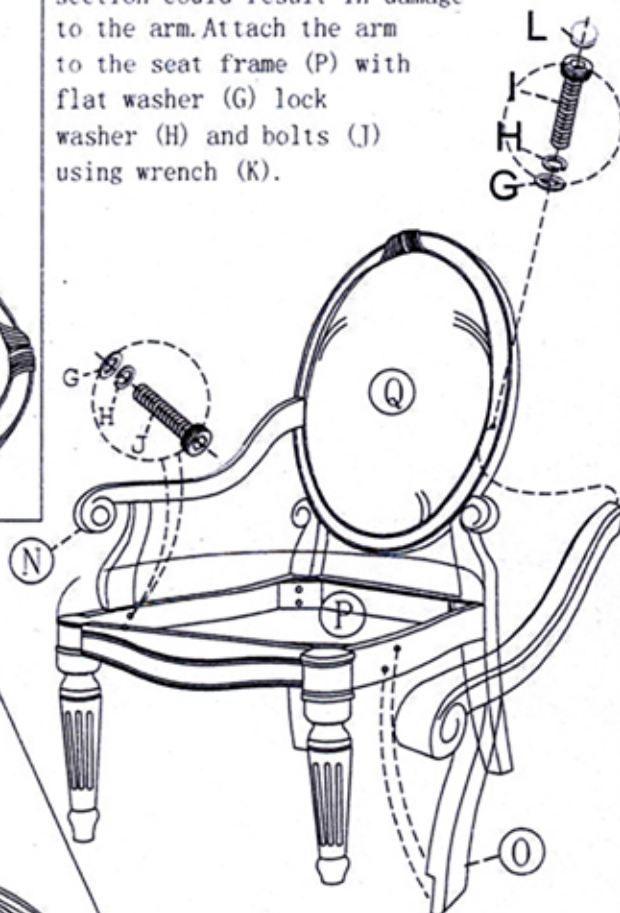

### STEP 3.

Attach front leg (M) to seat frame (P) using flat washer (A) lock washer (B) and bolts (D). Tighten slightly not fully.

Secure the arm rest to chair back (Q) with flat washer (G) lock washer (H) and bolts (I) using wrench (K). Place chair upright on a level surface & tighten all bolts securely. Insert the plug (L) to the hole of chair back.

**CaWarnings :** Failure to observe these warnings can result in serious injury and/or product damage:

- \* Never stand on the chair.
- \* Never use the chair as a ladder.
- \* Do not tip the chair when seated.
- \* Periodically re-tighten all bolts.
- \* Do not exceed 250lbs. (113.4kgs) weight limit on the chair.











**Best Master Furniture™**  
The Imported Furniture Specialist

# ASSEMBLY INSTRUCTION

## ITEM: KF0024 | KF0025


### PARTS LIST

PARTS#	PARTS NAME	DRAWING	QTY	PARTS#	PARTS NAME	DRAWING	QTY
A	FLAT WASHER 5/16"X 3/4"		8	E	LEG		4
B	LOCK WASHER 5/16"		8	F	TOP FRAME		1
C	BOLTS DIA 5/16"X1-1/2"		8				
D	ALLEN WRENCH 5/16"		1				

Note: Do Not tighten bolts until assembly is fully completed.


#### STEP 1.

Remove all parts from carton and separate them into part number groups as indicated on the part list. Place the table top (F) on a smooth flat surface with the holes facing up. Loosely tighten all bolts until instructed to fully tighten at the end of step.

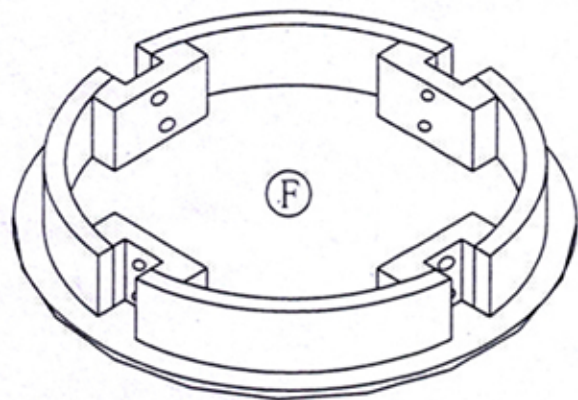

#### STEP 2.

Attached leg (E) to top frame (F). Insert flat washer (A) lock washer (B) and bolts (C). Use allen wrench (D) to secure bolts (C). Set the assembled table upright on a level surface & fully tighten all bolts securely.

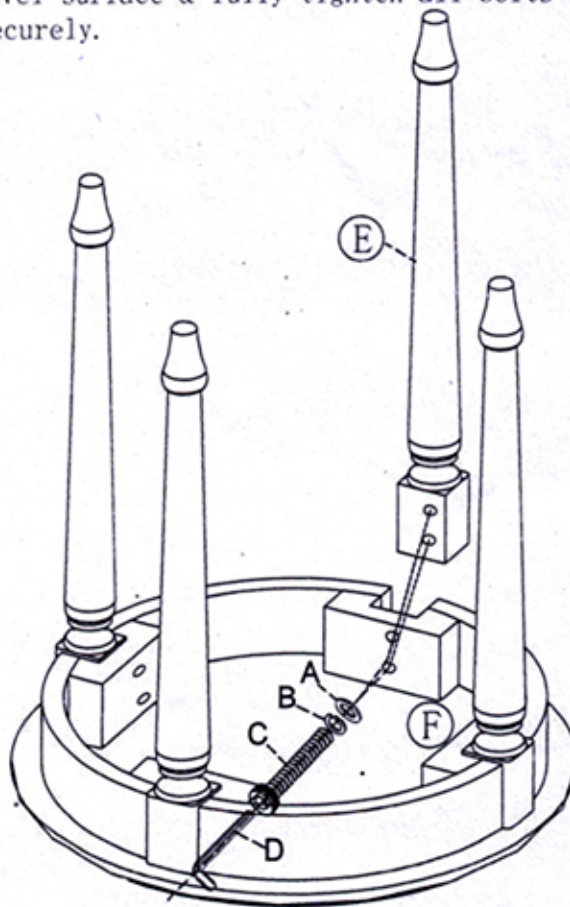

Warnings : Failure to observe these warnings can result in serious injury and/or product damage:

- \* Never stand on the table.
- \* Periodically re-tighten all bolts.